



BURAN

GROUP OF COMPANIES

BARRACUDA

Equal-bore Frac Sleeve for Multistage Fracturing

- UP TO 100 STAGES OF FRAC
- LINER CEMENTING FROM THE SHOE
- PRECISE LANDING CONTROL
- WELL LOGGIN AFTER FRAC
- EQUAL-BORE DIAMETER
OF FRAC SLEEVES
- RE-FRAC ABILITY
- OPERATION TIME SAVING



Buran Group

Sales Office, Russia, Moscow,
Novodanilovskaya embankment,
house 6, building 1
+7 (495) 128-80-21
office@gkburan.com

Production Site,
Russia, Chelyabinsk

Equal ID of Frac Sleeves


«BARRAKUDA»,

manufactured according
to our own design documentation



Steel collets

- 114 mm – 2024
- 146 mm – 2026
- 102 mm - 2026

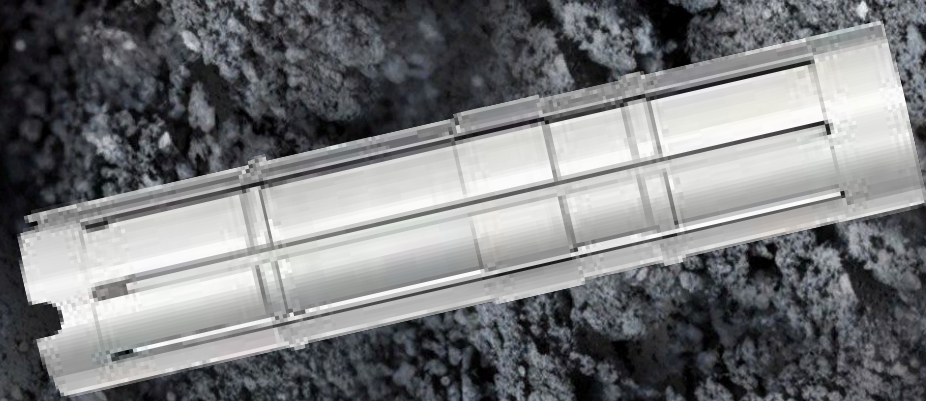

Specifications:

Column Diameter (in/mm)	Column Weight kg/m	Inner Diameter (in/mm)	Frac Sleeve Bore Diameter (in/mm)	Outer Diameter of Sleeve before Frac (in/mm)	Inner Diameter of Sleeve after Frac (in/mm)	Ball Diameter (in/mm)
5 1/2 (139,7)	25,3	4,892 (124,25)	4,767 (121,08)	4,705 (119,5)	4,205 (106,8)	4,375 (111,12)
5 1/2 (139,7)	26,76	4,448 (121,36)	4,623 (118,18)	4,591 (116,61)	4,092 (103,93)	4,250 (107,95)
5 1/2 (139,7)	34,23	4,670 (118,61)	4,545 (115,44)	4,483 (113,86)	3,983 (101,16)	4,188 (106,37)
5 1/2 (139,7)	39,88	4,500 (114,3)	4,375 (98,42)	4,313 (109,55)	3,875 (98,42)	4,000 (101,6)
4 1/2 (114,3)	17,26	4,000 (101,6)	3,875 (98,42)	3,813 (96,85)	3,341 (84,86)	3,500 (88,9)
4 1/2 (114,3)	20,01	3,937 (100)	3,74 (95)	3,901 (99,1)	3,263 (82,9)	3,500 (88,9)
4 1/2 (114,3)	22,47	3,826 (97,18)	3,701 (94)	3,643 (92,53)	3,167 (80,44)	3,375 (85,72)
4" (101,6)	15,2	3,488 (88,6)	3,291 (83,6)	3,276 (83,21)	2,810 (71,34)	3,125 (79,37)
3 1/2 (88,9)	13,8	2,992 (76)	2,876 (73)	2,813 (71,45)	2,400 (60,96)	2,400 (63,5)
2 7/8 (73)	6,4	2,441 (62,00)	2,347 (59,51)	2,315 (58,80)	1,908 (48,46)	2,000 (50,8)